


cremona center M

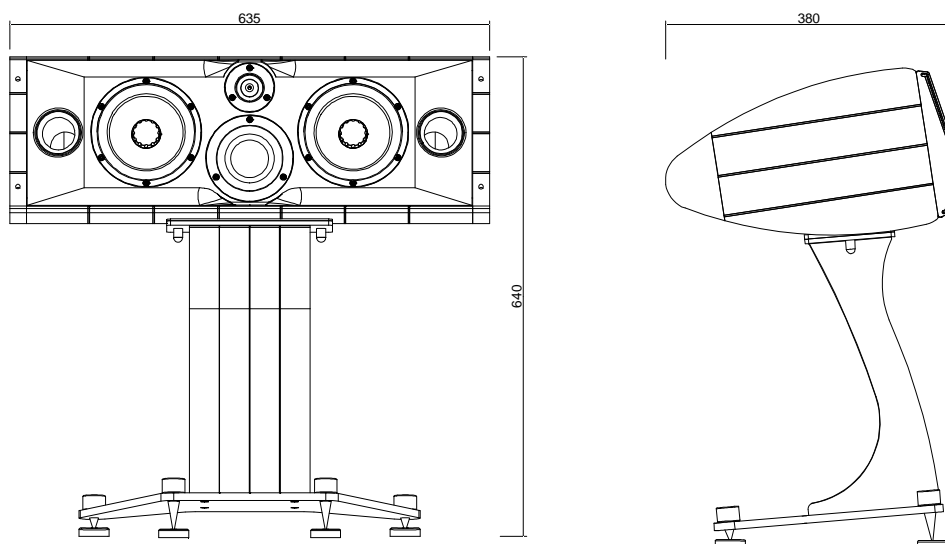

SYSTEM: 3 way floorstanding vented box loudspeaker.

CABINET: Lute shape design, combination of sandwich construction obtained using hand selected wood layers and solid maple, quality graded and oriented for carefully optimized resonances control.

TWEETER: 25 mm ultra dynamic ring radiator-driver, neodymium magnet system.

MIDRANGE: 120 mm cone driver with Symmetric Drive Motor System and selected black wood fiber cone, high resolution, treated for break-up control.

Dynamic linear suspension, neodymium magnet system. Designed synergistically with its vented acoustic chamber. Sonus faber exclusive.

WOOFERS: 150 mm lightweight Aluminum/Magnesium alloy cone drivers.

Ultra dynamic performance and linearity. Special coaxial anti-compressors are used, designed to remove cavity resonance and distortions.

CROSS-OVER: Non-resonant third order design, optimized phase characteristics for optimal space/time performance, cross-over points 450 Hz – 3.600 Hz.

FREQUENCY RESPONSE: 50 Hz – 30.000 Hz, tuning ports included.

SENSITIVITY: 91 dB SPL (2.83 V/1m).

NOMINAL IMPEDANCE: 4 ohm.

SUGGESTED AMPLIFIER POWER OUTPUT: 50W – 200W, without clipping.

LONG-TERM MAXIMUM INPUT VOLTAGE (IEC-268-5): 25V rms.

FINISH: Natural maple or light graphite multicoated with medium gloss ecologically sensitive lacquer.

DIMENSIONS: 215 x 635 x 380 mm (HxWxD).

WEIGHT: 18.5 Kg– net weight / 22.3 Kg– shipping weight.

OPTIONAL DEDICATED STAND:

Dimensions: 420 x 455 x 310 mm (HxWxD).

Weight: 10.2 Kg – net weight / 13 Kg – shipping weight.

TOTAL DIMENSIONS: 640 x 630 x 380 mm (HxWxD).