


elipsa

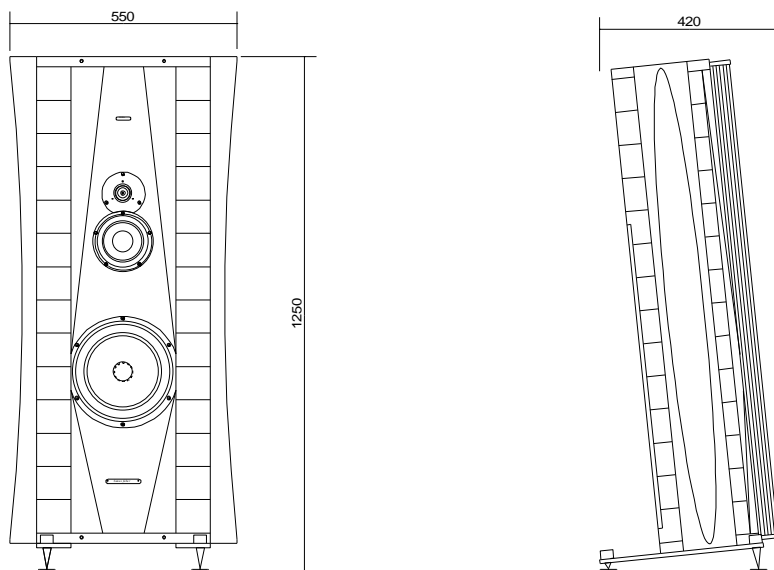

SYSTEM: 3 way floorstanding vented box loudspeaker.

CABINET: Elliptical shape design, combination of sandwich construction, obtained using hand selected wood layers and solid maple, quality graded and oriented for carefully optimized resonances control. Sub-structural ribs are strategically placed for absolute rejection of spurious vibrations and standing waves control.

TWEETER: 25 mm ultra dynamic ring radiator-driver.

MIDRANGE: 150 mm cone driver with Symmetric Drive Motor System and selected black wood fiber cone, high resolution, treated for break-up control. Dynamic linear suspension. Designed synergistically with its vented acoustic chamber. Sonus faber exclusive.

WOOFER: 260 mm lightweight Aluminum/Magnesium alloy cone driver.

Ultra dynamic performance and linearity. Special coaxial anti-compressors is used, designed to remove cavity resonances and distortions.

CROSS-OVER: Non-resonant second order design, optimized phase characteristics for optimal space/time performance, cross-over points 250 Hz – 2.300 Hz.

FREQUENCY RESPONSE: 35 Hz – 30.000 Hz, tuning ports included.

SENSITIVITY: 91 dB SPL (2.83 V/1m).

NOMINAL IMPEDANCE: 4 ohm.

SUGGESTED AMPLIFIER POWER OUTPUT: 50W – 300 W without clipping.

LONG-TERM MAXIMUM INPUT VOLTAGE (IEC-268-5): 25V rms.

FINISH: Natural maple or light graphite multicoated with medium gloss ecologically sensitive lacquer.

DIMENSIONS: 1250 x 550 x 420 mm (HxWxD).

WEIGHT: 97 Kg per pair – net weight / 113.5 Kg per pair – shipping weight.